

gruton™

Excellence Bonding



Tileadhesive | Epoxygrout | WallPutty | Blockjoint | Waterproofing

INDEX

DETAILS

PAGE NO.

ABOUT US, VISION, MISSION	1-2
TILES AND STONE ADHESIVE	3-22
— NSA 15	7-8
— NSA 35	9-10
— NSA 55	11-12
— NSA 75	13-14
— NSA 95	15-16
— NSA 105	17-18
— NSA 125	19-20
— NSA 145	21-22
WALL PUTTY	23-26
BLOCK JOINT	27-30
TILE GROUT	31-36
EPOXY GROUT	37-46
GROUT ADMIXTURE	47-48
TAPO CLEANER	49-50
TILE CLEANER	51-52
SBR LATEX	53-54
ACCESSORIES	55-60
— NOTCH TROWEL	57-58
— TILE SPACERS	59-60
— TILE EQUALIZER LEVALANR KIT	61-62
— TILE SUCTION CUP	63-64



ABOUT US

Gruton has been playing an integral role in your homes, offices, and lives. It is a name synonymous with severe or strong with around experience of 3 decades in the ceramic and construction chemicals field.

We focus on delivering a comprehensive range of Tile Fixing and Care and Stone Fixing and Care products. Gruton also offers a wide array of products in the categories of Building Repair, Grouting Solutions and Waterproofing.

At Gruton, we combine beauty with endurance. We have a wide array of products in the categories of Tile Fixing and Care, Stone Fixing and Care, Building Repair, Grouting Solutions and Waterproofing. We share a strong bond of trust with our consumers. Our world-class range of products are more than just tile-fixing applications. They allow homeowners, architects and builders to dream and sit back without the worry, knowing that their idea now has the perfect way to be executed. At Stiffer, it is our commitment to fulfilling what they envision.

OUR VISION

Willingness towards the enhancement of strength and Passionately strive to delight every customer of Gruton by providing innovative and quality products and services on an on- going basis and to become a most sought after brand.

OUR MISSION

Gruton is committed to providing technologically-advanced, aesthetically Modern, high-strength, premium quality that satisfies commercial as well as residential customer needs in domestic and international markets.

**TRANSFORM
YOUR SPACE WITH US**



TILES & STONE ADHESIVE

Tile Adhesive VS Sand-Cement Mortar

Tile Adhesives	Sand-Cement Mix
Fast and efficient, easy to use, only mix with water.	Time consuming.
No prior soaking of tiles is required.	Variety Of Tiles must be soaked.
Better bonding strength.	Moisture can accumulate beneath the floor tile and wall tiles, causing hollow spaces and debonding.
Can be grouted within 24 hours without waiting for the moisture to evaporate.	Grouting cannot be done within 24 hours.
The application can be done on existing tiles and many special substrates like polished cement, dry wall system, etc.	Not applicable to lay low absorbent tiles like 60 x 60 cm granite or any larger tile sizes. Not applicable to lay tiles on existing tiles, and on polished cement. Not applicable to lay glass mosaics.
Tile adhesive typically has a smooth slurry that helps create a thinner layer when applying it for natural stone, ceramic tiles, and other wall tiles installation.	Cement-Sand slurry are usually thicker in consistency, making it difficult to spread an even layer onto the surface.



TILE & STONE ADHESIVE

At Gruton, we offer a comprehensive range of tile adhesive products for you to choose from, making us one of the leading tile adhesive manufacturers in India.

Come rain, sunshine, humidity, or pollution, we are the leading tile adhesive manufacturers in India for all the right reasons and will protect your walls and floors from cracking and debonding. Our complete range of products is designed to cater to several different purposes in your homes and offices.



For internal & External floor & wall



Available in different Colours



Easy to Clean



Non-Shrinking



Non-Cracking



Low VOC

NSA 15

NSA 35

NSA 55

NSA 75

NSA 95

NSA 105

NSA 125

NSA 145



NSA 15

20 kg

GREY



Features

- † Easy to apply.
- † High bonding strength.
- † Very low shrinkage prevents debonding and gives longer life to tiles.
- † **Premixed material** – Add only water.
- † **Slip-resistant** for vertical application.
- † Shrinkage cracks get Minimized / eliminated due to its **self-curing** properties.



Product Description

NSA-15 is basic grade of GRUTON tiles adhesive. According to the ISO, the product meets CITE category parameters. The GRUTON is recommended tiles adhesive for wall tiles and flooring tiles, marble and stone. We can use GRUTON Tiles Adhesive for below purposes.

NSA-15 GRUTON Tile Adhesive complies to requirements of IS 15477 : 2019 – Type 'T' "Specification for Adhesives for use with Ceramic Tiles and Mosaics.

Area of Applications

Cementitious screed and plasters in internal areas.

Floor : Ceramic Wall & Porcelain Tiles 200X200, 300x300, 300x600, 600x600 mm

Pack Size : 20 kg

Colour : Grey

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5-6.5 kg/ sq. mtr.

Note : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

NSA 35

20 kg

GREY

Features

- † Easy to apply.
- † **Premixed material** - Add only water.
- † Ideal product for **tile-on-tile** applications on floor.
- † **Sag resistant formula** : provides hassle-free application on vertical walls.
- † **Water resistant** - suitable for wet areas.
- † Good adhesive bond strength & bonds to **various cement** -based substrates.
- † **Low VOC** - for healthy living
- † High bonding strength.



Product Description

NSA-35 Adhesive is a polymer modified, thin-set tile adhesive for fixing ceramic, semi-vitreous tile, vitrified tiles & natural stones of regular size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor application, in dry as well as wet areas.

NSA-35 Adhesive complies to Type 1 'T' as per "IS 15477:2019 - adhesives for use with Ceramic Tiles and Mosaics - specification.

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

Flooring and walls, for internal applications & external shaded area, external area*, dry & wet area, new construction & renovation, domestic applications, commercial applications.

Wall : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600X600 mm)

Floor : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 800X800, 600X1200 mm)

Colour : Grey **Pack Size** : 20 kg

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5-6.5 kg/ sq. mtr.

Note : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life : 12 Month from the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



NSA 55

20 kg

GREY

Features

- ✦ Easy to apply.
- ✦ **Premixed material** – Add only water.
- ✦ **Highly Polymer modified** – provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- Sag resistant formula** : provides hassle-free application on vertical walls.
- Water & shock resistant** – suitable for wet areas & commercial floor too.
- Sustains heat ageing** – making it ideal for high temperature locations and for hot temperature applications, like Jacuzzi, sauna, etc.

Low VOC – for healthy living



Product Description

NSA-55 Adhesive is a polymer modified, thin-set tile adhesive for fixing ceramic, semi-vitreous tile, vitrified tiles & natural stones of regular size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor application, in dry as well as wet areas.

NSA-55 Adhesive complies to Type 2 'T' as per "IS 15477:2019 – adhesives for use with Ceramic Tiles and Mosaics – specification.

Also, GRUTON NSA-55 conforms to class C2 T as per EN 12004:2017 / ISO 13007 – a cementitious (C) Normal Adhesive (I) slip resistant (T) Extended Open Time.

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, large format tiles, precast terrazzo, natural stones, low thickness slabs.

Cement-based screeds / bed, gypsum & cement based plasters / renders, concrete surfaces & bricks, existing tiles & stones, waterproofing products, other cement-based surface.

Wall: Ceramic Wall & Porcelain Tiles (300x600, 600x600, 600x1200, 1000x1000mm)

Floor : Ceramic Wall & Porcelain Tiles (300x600, 600x600, 800x800, 600x1200, 800x1600 mm)

Colour : Grey **Pack Size :** 20 kg

Coverage: For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5–6.5 kg/ sq. mtr.

Note : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life: 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.

NSA 75

20 kg

GREY

Features

- ✦ Easy to apply.
- ✦ **Premixed material** – Add only water.
- ✦ **Highly Polymer modified** – provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- ✦ **Sag resistant formula** – provides hassle-free application on vertical walls.
- ✦ **Flexible adhesive** – allows to sustain minor vibration in substrate.
- ✦ **Long open time** – suitable for large format & external condition.
- ✦ **Water & shock resistant** – suitable for wet areas & commercial floor too.
- ✦ **Sustains heat ageing** – making it ideal for high temperature locations and for hot temperature applications, like Jacuzzi, sauna, etc.
- ✦ **Low VOC** – for healthy living.



Product Description

NSA-75 GRUTON Adhesive is a highly polymer modified, thin-set tile adhesive for fixing for all type of tiles, mosaics and natural stones, on a variety of surfaces, for both vertical and horizontal application, in dry as well as wet areas for indoor as well as outdoor application. It can be used to fix regular size tile in commercial area as it accommodates shocks due to heavy traffic.

NSA-75 Adhesive complies to Type 3 'T' as per "IS 15477:2019 - adhesives for use with ceramic, mosaic and Stone tiles – Specification

Also, GRUTON NSA-75 conforms to class C2 TE as per EN 12004:2017/ ISO 13007 - a cementitious (C) Normal Adhesive (I) slip resistant (T) Extended Open Time (E) tile adhesive.

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, glass mosaic tiles, large format tiles, precast terrazzo, marble & natural stones, low thickness slabs.

Cement-based screeds/ bed, gypsum & cement based plasters/ renders, concrete surfaces & bricks, existing tiles & stones, other cement-based surface, waterproofing products, drywall like cement /bison/ gypsum boards* .

Wall : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 600x1200, 800x1600, 1200x1200, 1200x1800 mm)

Floor : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 800x800, 600x1200, 800x1600, 1200x1800, 1200x2400 mm)

Colour : Grey **Pack Size :** 20 kg

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5-6.5 kg/ sq. mtr.

Note : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



NSA 95

20 kg

GREY

Features

- ✦ Easy to apply.
- ✦ **Premixed material** – Add only water.
- ✦ **Highly Polymer modified** – provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- ✦ **Sustains heat ageing** – Idea for external & high temperature applications.
- ✦ **Sag resistant formula** : provides hassle-free application on vertical walls.
- ✦ **Long open time** – suitable for large format & external condition
- ✦ **Water & shock resistant** – suitable for wet areas & commercial floor too.
- ✦ **Low VOC** – for healthy living.



Product Description

NSA-95 GRUTON Adhesive is a high polymer modified & highly flexible adhesive with enhanced properties of slip resistant, extended open time & excellent bond strength which is necessary for fixing large format tiles/ natural stones & slim tiles on vertical & horizontal surface for indoor as well as outdoor application especially in external conditions & on substrates subject to deformations/ vibrations.

NSA-95 a Adhesive complies to Type 4 'T S1' as per "IS 15477: 2019 – Adhesives for use with ceramic, mosaic and stone tiles – Specification

Also, GRUTON NSA-95 Adhesive conforms to class C2TES1 as per EN 12004:2017/ ISO 13007 – a cementitious (C) improved performance (2) slip resistant (T) deformable (S1) with extended open time (E) tile adhesive.

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, glass mosaic tiles, large format tiles, precast terrazzo, marble & natural stones, low thickness slabs.

Cement-based screeds/ bed, gypsum & cement based asters/ renders, concrete surfaces & bricks, existing tiles & stones, other cement-based surface, waterproofing products, drywall like cement /bison/ gypsum/ fibre boards etc*, Thermal insulation panel.

Wall : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 600x1200, 800x1600, 800x2400, 1200x2400, 1600x3200 mm)

Floor : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 800x800, 600x1200, 800x1600, 1200x1800, 1200x2400, 1200x3200, 1600x3200 mm)

Colour : Grey **Pack Size :** 20 kg

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5–6.5 kg/ sq. mtr.

Note: The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



NSA 105

20 kg

WHITE

Features

- ✦ Easy to apply.
- ✦ **Premixed material** - Add only water.
- ✦ **Highly Polymer modified** - provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- ✦ **Sag resistant formula** : provides hassle-free application on vertical walls.
- ✦ **Flexible adhesive** - allows to sustain minor vibration in substrate.
- ✦ **Long open time** - suitable for large format & external.



Product Description

NSA-105 GRUTON Adhesive is a high polymer modified & highly flexible adhesive with enhanced properties of slip resistant, extended open time & excellent bond strength which is necessary for fixing large format tiles/ natural stones & slim tiles on vertical & horizontal surface for indoor as well as outdoor application especially in external conditions & on substrates subject to deformations/ vibrations.

NSA-105 a Adhesive complies to Type 2 'T' as per "IS 15477: 2019 - Adhesives for use with ceramic, mosaic and stone tiles – Specification

Also, GRUTON NSA-105 conforms to class C2 T as per EN 12004:2017/ ISO 13007 - a cementitious (C) Normal Adhesive (I) slip resistant (T) Extended Open Time

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, large format tiles, precast terrazzo, natural stones, low thickness slabs.

Cement-based screeds/ bed, gypsum & cement based plasters/ renders, concrete surfaces & bricks, existing tiles & stones, waterproofing products, other cement-based surface.

Wall : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 600x1200, 800x1600 mm)

Floor: Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 800x800, 600x1200, 800x1600, 1200x1800 mm)

Colour : White **Pack Size :** 20 kg

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5-6.5 kg/ sq. mtr.

Note: The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



NSA 125

20 kg

WHITE

Features

- † Easy to apply.
- † **Premixed material** – Add only water.
- † **Highly Polymer modified** – provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- † **Sag resistant formula** : provides hassle-free application on vertical walls.
- † **Flexible adhesive** – allows to sustain minor vibration in substrate
- † **Long open time** – suitable for large format & external condition
- † **Water & shock resistant** – suitable for wet areas & commercial floor too.
- † **Sustains heat ageing** – making it ideal for high temperature locations and for hot temperature applications, like Jacuzzi, sauna, etc.
- † **Low VOC** – for healthy living.



Product Description

NSA-125 GRUTON Adhesive is a high polymer modified & highly flexible adhesive with enhanced properties of slip resistant, extended open time & excellent bond strength which is necessary for fixing large format tiles/ natural stones & slim tiles on vertical & horizontal surface for indoor as well as outdoor application especially in external conditions & on substrates subject to deformations/ vibrations.

NSA-125 Adhesive complies to Type 3 'T' as per "IS 15477:2019 – adhesives for use with ceramic, mosaic and Stone tiles – Specification.

Also, GRUTON NSA-75 conforms to class C2 TE as per EN 12004:2017/ ISO 13007 – a cementitious (C) Normal Adhesive (I) slip resistant (T) Extended Open Time (E) tile adhesive.

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, glass mosaic tiles, large format tiles, precast terrazzo, marble & natural stones, low thickness slabs.

Cement-based screeds/ bed, gypsum & cement based plasters/ renders, concrete surfaces & bricks, existing tiles & stones, other cement-based surface, waterproofing products, drywall like cement /bison/ gypsum boards* .

Wall : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600X600, 600X1200, 800x1600 mm)

Floor : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 800X800, 600X1200, 800X1600, 1200x1800, 1200X2400 mm)

Colour : White **Pack Size :** 20 kg

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5-6.5 kg/ sq. mtr.

Note : The coverage will vary depending on trowel notch size, type, size of tile and substrate

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



NSA 145

20 kg

WHITE

Features

- ✦ Easy to apply.
- ✦ **Premixed material** – Add only water.
- ✦ **Highly Polymer modified** – provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- ✦ **Sustains heat ageing** – Idea for external & high temperature applications.
- ✦ **Sag resistant formula** : provides hassle-free application on vertical walls.
- ✦ **Long open time** – suitable for large format & external condition.
- ✦ **Water & shock resistant** – suitable for wet areas & commercial floor too.
- ✦ **Low VOC** – for healthy living.



Product Description

NSA-145 GRUTON Adhesive is a high polymer modified & highly flexible adhesive with enhanced properties of slip resistant, extended open time & excellent bond strength which is necessary for fixing large format tiles/ natural stones & slim tiles on vertical & horizontal surface for indoor as well as outdoor application especially in external conditions & on substrates subject to deformations/ vibrations.

NSA-145 GRUTON Adhesive complies to Type 4 'T S1' as per "IS 15477: 2019 – Adhesives for use with ceramic, mosaic and stone tiles – Specification.

Also, NSA-145 GRUTON Adhesive conforms to class C2TES1 as per EN 12004:2017/ ISO 13007 – a cementitious (C) improved performance (2) slip resistant (T) deformable (S1) with extended open time (E) tile adhesive.

We can use GRUTON Tiles Adhesive for below purposes.

Area of Applications

All types of ceramic tile, terracotta, pavers, brick, vitrified tiles, glass mosaic tiles, large format tiles, precast terrazzo, marble & natural stones, low thickness slabs.

Cement-based screeds/ bed, gypsum & cement based asters/ renders, concrete surfaces & bricks, existing tiles & stones, other cement-based surface, waterproofing products, drywall like cement /bison/ gypsum/ fibre boards etc*., Thermal insulation panel.

Wall : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600X600, 600X1200, 800x1600, 800X2400, 1200X2400, 1600X3200 mm)

Floor : Ceramic Wall & Porcelain Tiles (300x300, 300x600, 600x600, 800X800, 600X1200, 800X1600, 1200x1800, 1200X2400, 1200X3200, 1600X3200 mm)

Colour : White **Pack Size :** 20 kg

Coverage : For a 3 mm bed thickness & after using of notch trowel, the coverage will be approximately 5–6.5 kg/ sq. mtr.


Note : The coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Shelf Life : 12 Month form the month & year of manufacturing when sealed packed & stored in proper (dry place) condition.



WALL PUTTY

Wall Putty is a high-quality, white cement-based fine powder that is applied to walls before painting to ensure a smooth, even, and durable finish. It fills in cracks, imperfections, and minor dents on both interior and exterior walls, providing a flawless surface for paint or other finishes. With excellent adhesion and water-resistant properties, wall putty enhances the longevity and appearance of paint, making it a crucial step in the preparation process.



Superior Whiteness



High Coverage



Smooth Finish



Truest White Wall Putty

WALL PUTTY



WALL PUTTY

40 kg

WHITE

Features

- ✦ Provides smooth and uniform finish to rough plasters
- ✦ Good Workability
- ✦ Does not require curing with water
- ✦ Good water resistance
- ✦ Good Tensile Adhesion Strength, Compressive Strength and Flexural Strength
- ✦ Controlled water vapour permeability
- ✦ Excellent abrasion resistance
- ✦ Resists growth of algae and fungi on wall
- ✦ Good intercoat adhesion to emulsion paints



Product Description

Gruton Wall Putty is a white cement based product with redispersible polymer and functional additives for application on interior and exterior rough plasters to give a smooth finish.

Area of Use

It can be used on all types of exterior cement plasters/interior walls, asbestos sheets, concrete etc

Application & Coverage

It can be used on all types of exterior cement plasters/interior walls, asbestos sheets, concrete, etc

On rough masonry surface by putty knife 2 COATS 10 - 15 sq.ft/kg for upto 1.5 mm thickness in 2 coats

Pack Size : 40 kg

Colour : White

Shelf Life

1 year from date of manufacture in original tightly sealed sacks away from direct sunlight and excessive heat.



BLOCK JOINT MORTAR

Block Joint Mortar is a high-performance, ready-to-use thin-set mortar specifically designed for laying AAC blocks, concrete blocks, fly ash bricks, and other masonry units. This advanced formulation provides excellent bonding strength, ensuring strong and durable joints between blocks. It significantly reduces the thickness of joints compared to traditional mortars, leading to faster construction and better thermal insulation.



Uv Resistance



Chemical Resistnace



Flexibility



Strong Bond



Durable



Economical

BLOCK JOINT



BLOCK JOINT MORTAR

40 kg

GREY

Features

- ✦ High Strength
- ✦ No curing required after block work is done.
- ✦ Flexible, shock & impact resistant
- ✦ Improved adhesion between two blocks
- ✦ Improved bond strength, compressive & tensile strength
- ✦ Thin jointing with high adhesion to contribute to load bearing capacity of masonry
- ✦ Easy to use
- ✦ Long working time
- ✦ Fast & economical



Product Description

Gruton Block Joint Mortar is a factory prepared blend of carefully selected raw materials, Portland cement and graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar, for laying Aerated Light weight concrete, Fly ash bricks, cement hollow blocks, Cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness, that meet and exceed the requirements of National and International Standards.

Area of Use

It can be used on all types of exterior cement plasters/interior walls, asbestos sheets, concrete etc

Application & Coverage

For interior and exterior use for preparing thin bed adhesive for AAC, ALC and cellular concrete blocks.

Actual coverage may vary from the quoted figures due to factors such as method of application, environmental conditions and surface texture.

Pack Size :40 kg

Colour :Grey

Shelf Life

1 year from date of manufacture in original tightly sealed sacks away from direct sunlight and excessive heat.




TILE GROUT

The grout provides excellent high-quality joints between tiles & stone. The joints are chemical, stain & abrasion resistance. Connect & Lock Epoxy Grout doesn't allow water to go through and can be used for filling the tile & stone joints up to 15mm on floor & on wall. Permanent locking of colours between joint.



Uv Resistance



Waterproof




**Acid & Stain
Resistant**



Flexible



Low VOC



Zero Shrinkage

TILE GROUT



Features & Advantages

- † Easy to use & Clean – just mix with water, ready to use.
- † Polymer modified – Crack free, minimum shrinkage & water resistance.
- † Suitable for varied tile and stones – All Ceramic, vitrified tiles, granites etc.
- † Available in range of attractive colors
- † Best results obtained when used in conjunction with Gruton Grout Admixture.
- † Low VOC – For healthy living.



Product Description

GRUTON Tile Grout is a polymer modified, cement-based tile joint filler used for filling the joints/ gap between the tiles. It effectively fills the gaps and gives water resistant, non-dusting tile joints. It is designed for grouting glazed, ceramic, porcelain, vitrified & fully vitrified tiles & natural stones.

GRUTON Tile Grout complies to CG2W requirements as per “BS EN 13888:2009 – Requirements, evaluation of conformity, classification and designation grouts for tiles and ISO 13007- Part 3: Terms, definitions and specifications for grouts”.

Area of Use

All types of ceramic tile, glazed tiles, porcelain tiles, vitrified & fully vitrified tiles, natural stones*, glass mosaic tiles.


Note:

1. For highly absorbent natural stones/ marbles which may form a wet or colored patch when tile grout is applied, do sample test to check for possible staining. It is recommended to use suitable Gruton Impregnating sealer on all sides & mask the tiles before grouting.
2. Best results obtained when used in conjunction with Gruton Grout Admixture. The addition of Gruton Grout Admixture to cement based grouts will enhance adhesion to tile/stone edges, reduce water permeability and imparts flexibility which would be needed for wider gap up to 6mm, wet areas, commercial applications & external areas.

Packaging :1kg



CHOOSING THE RIGHT TILE GROUT COLOUR

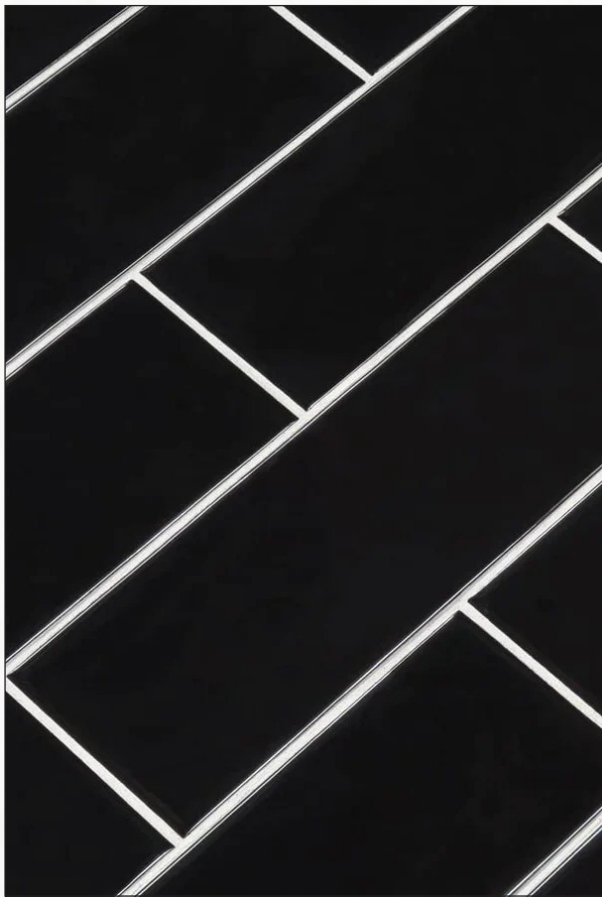


WHITE



BURGUNDY



DARK GREY



NANO IVORY



BLACK



BABY PINK



BROWN



Magenta



SKY BLUE



BOTTLE GREEN



LIGHT GREY



COFFE BROWN



MULBERRY



LEMON YELLOW



JAISALMER



TERRACOTTA


Colour Show Are indicative only. Chek actual Grout for exact colour

EPOXY GROUT

The grout provides excellent high-quality joints between tiles & stone. The joints are chemical, stain & abrasion resistance. Connect & Lock Epoxy Grout doesn't allow water to go through and can be used for filling the tile & stone joints up to 15mm on floor & on wall. Permanent locking of colours between joint.



Uv Resistance



Waterproof




Acid & Stain Resistant



Flexible



Low VOC



Zero Shrinkage

EPOXY GROUT





Product Description

GRUTON Epoxy Grout is a stainless, chemical resistant, hard wearing & impervious epoxy - based tile joint filler which has high degree of resistance to abrasion, impact & shocks. It is designed for grouting gap between glazed, ceramic, porcelain, vitrified & fully vitrified tiles, natural stones & Glass mosaics. Gruton Epoxy Grout can also be used as a high-performance epoxy adhesive for fixing tiles & Stone.

Area of Use

All types of ceramic tile, glazed tiles, porcelain tiles, vitrified & fully vitrified tiles, natural stones* , large format tiles, glass mosaic tiles, composites & engineered stone.

Floor & walls of internal & external area* , dry as well as wet area, water submerged area, food, pharma & hygiene required areas, area containing aggressive chemicals* , heavy traffic/ movement areas, domestic applications, commercial applications, wider tile joints

Note :

1. For highly absorbent natural stones/ marbles which may form a wet or colored patch when tile grout is applied, do sample test to check for possible staining. It is recommended to use suitable Gruton Impregnating sealer on all sides & mask the tiles before grouting.
2. For external application, please contact GRUTON personnel for technical assistance.
3. See chemical resistance table for chemical areas.

Packaging

1kg & 5kg



Coverage

Consumption table dependent on the size of the tiles and width of the joints (kg/m²)

Tile Dimension (mm)			Joint / Grouting Width (mm)							
Length	Width	Thickness	2	3	4	5	6	8	10	12
25	25	6	1.68	2.52	3.36	4.20	5.04	6.72	8.40	10.1
25	50	6	1.26	1.89	2.52	3.15	3.78	5.04	6.30	7.56
50	50	6	0.84	1.26	1.68	2.10	2.52	3.36	4.20	5.04
100	100	6	0.42	0.63	0.84	1.05	1.26	1.68	2.10	2.52
100	100	10	0.70	1.05	1.40	1.75	2.10	2.80	3.50	4.2
300	200	6	0.18	0.26	0.35	0.44	0.53	0.70	0.88	1.05
300	300	6	0.14	0.21	0.28	0.35	0.42	0.56	0.70	0.84
450	300	6	0.12	0.18	0.23	0.29	0.35	0.47	0.58	0.7
600	300	6	0.11	0.16	0.21	0.26	0.32	0.42	0.53	0.63
600	600	8	0.09	0.14	0.19	0.23	0.28	0.37	0.47	0.56
800	800	8	0.07	0.11	0.14	0.18	0.21	0.28	0.35	0.42
1000	1000	10	0.07	0.11	0.14	0.18	0.21	0.28	0.35	0.42
1200	600	10	0.09	0.13	0.18	0.22	0.26	0.35	0.44	0.52
1200	800	10	0.07	0.11	0.15	0.18	0.22	0.29	0.36	0.44
1200	1200	12	0.07	0.11	0.14	0.18	0.21	0.28	0.35	0.42
1600	800	12	0.08	0.12	0.16	0.20	0.24	0.32	0.39	0.47
1800	1200	12	0.06	0.09	0.12	0.15	0.18	0.23	0.29	0.35

* Coverage mentioned in table is indicative only and can vary as per the tile size, thickness, joint width & wastage during application.

Features & Advantages

- † Stainless - Will not be stained by most foods, beverages and cleaning agents
- † Easy Maintenance - Smooth texture, easier to clean.
- † Provides excellent chemical resistant to many acids, alkalis and corrosives.
- † Provides hygienic, hard wearing and abrasion resistant surface.
- † Waterproof property
- † Durable - Will not peel, crack or powdering
- † Excellent mechanical property & highly resistant to heavy traffic.
- † Easy to Use - No noxious odor, nonflammable, water cleanable, easy to clean.
- † Stable and uniform coloring for all types of tiles.



3-PART COLOR CHART



301 JAISALMER



308 S.S GREY



315 SKY BLUE



322 BROWN



302 BLACK



309 HEMP



316 S.D.GREY



323 VALLY GREEN



303 YELLOW



310 TOMATO RED



317 CREMY CHOCOLATE



324 SABLE



304 OLIVE GREEN



311 IVORY



318 DEEP BROWN



325 WHITE



305 DARK GREY



312 DARK BLUE



319 BLOOD RED



326 GREEN



306 DEEP RED



313 CO.BROWN



320 BABY PINK



327 ROYAL TERRACOTTA



307 ALP BLUE



314 KESAR



321 DARK PURPLE

ALL COLOURS ARE AVAILABLE IN SILVER,
GOLDEN, COPPER GLITTER SPARKLE*

**Actual shade & texture will depend
on jobsite condition**

2-PART COLOR CHART



201 WHITE



210 PEACH



219 METAAL



**228 TURQUOISE
BLUE**



202 IVORY




211 TEAL



220 BURGUNDAY



229 SKY BLUE



**203 NAVAJO
WHITE**



212 GLOOMY



**221 CANDY
CHOCKO**



230 BROWN RED



204 BLACK



213 DIM GRAY



222 TERRA RED



231 TAN



**205 ROBO
BLACK**



214 DARK GREY



**223 TOMATO
RED**



232 ORANGE



206 MYSTIC



215 STEEL GREY



224 PLUM



**233 LEMON
YELLOW**



207 CHOCOLATE



216 GAINS GREY



**225 ROSY
BROWN**



**234 DARK OLIVE
GREEN**



208 HAZEL



217 DEEP BLUE




226 BABY PINK



**235 FOREST
GREEN**



209 BROWN



218 ROYAL BLUE



227 SIENNA



236 STAR GREEN

GROUT ADMIXTURE



200 ml

400 ml

Product Description

Gruton Grout Admixture is a white, polymer emulsion to be added in Gruton cementitious tile grout to enhance the performance properties and durability of the tile grout. Addition of Gruton Grout Admixture with Gruton Tile Grout helps to impart more flexibility, strength, water & stain resistance, abrasion resistance and to fill wider joints between tile and stone.

Area Of Use

All types of ceramic tile, glazed & porcelain tiles, vitrified & fully vitrified tiles, natural stones* , large format tiles, glass mosaic tiles.

Floor and walls, internal & external area* , domestic applications, commercial applications* , wider tile joints up to 6 mm.

Packaging

200ml & 400ml

Features

- ✦ Easy to use & clean - Just mix with Gruton Tile Grout on site, ready to use.
- ✦ Polymer emulsion - Impart flexibility, water & stain resistant, abrasion resistant.
- ✦ Suitable for varied tile and stones - Ceramic, vitrified, marbles, granites etc.
- ✦ Crack free and less of shrinkage reduces the chances of water seepage.
- ✦ Durable - Enhances compressive & flexural strength and shock resistance.



TAPO CLEANER



250 ML

1 LTR

Product Description

Gruton Tapo Cleaner is a high quality rapid active cleaner and degreasing solution for use on bathroom fittings, ss kitchen sinks, etc.

Area of Use

Gruton Tapo Cleaner For Bathroom Faucets & Accessories, Taps, Showers, Etc.

Home Care, Hospitals, Hotels & Restaurants, Resorts, Corporate Offices, Shopping Malls, Machineries & Industries.

Packaging

250 ml & 1LTR

Features & Advantages

- ✦ Easy to use - just spray & clean by brush / cotton
- ✦ Removes difficult stains easily - Fast & effective.
- ✦ Degreases the tile surface easily for soaps, scum, efflorescence, mineral deposit.
- ✦ Protects the color & shine
- ✦ Not harmful like acid.



TILE CLEANER

500 ml

1 ltr



Features & Advantages

- † Easy to use – just mix with water & clean the surface.
- † Removes difficult stains easily – Fast & effective.
- † Degreases the tile surface easily for soaps, scum, efflorescence, mineral deposit.
- † Cleans all types of tile like ceramic, porcelain & vitrified tile and grout.
- † Protects the color & shine of tile.
- † Does not damage joints between ceramic tiles, even those grouted with colored products.
- † Not harmful like acid.

Product Description

Gruton Tile Cleaner is a high quality rapid active cleaner and degreasing solution for use on tiles, bathtubs, wash basin, privy basin and concrete etc. It is used to clean whitish spot/ layer as normally observed in the bathroom under plastic/ metal buckets (normal detergent is not helpful) with ease.

It is also used as rapid removal of white yellowish spot/layer along with water stains over tiles, cement stains, grime, oil, paint stains, grease, moss and wax from concrete, asbestos, terrazzo and ceramics.

Area of Use

Stain cleaning for ceramic tile, glazed tiles, porcelain tiles, vitrified tiles, glass mosaic tiles & sanitaryware. Cleaning moss and wax from concrete, asbestos, terrazzo and ceramics. Surface before & after application of epoxy products. Natural stones*

Cleaning floor and wall tiling in kitchen, bathrooms, toilets, garages, factories, general building sites & residential tiling. Internal & external tiling area. Domestic & commercial tiling area. Routing tile cleaning with mop in bathroom & other tiling area.

Note:

Gruton Tile Cleaner before using for cleaning of coloured concrete, granite, marble stone flooring with corner test because it may etch the surface. (If stone shows discoloration up to 24 hrs. after application, do not use product).

Packaging

500 ml & 1LTR





Product Description

Gruton SBR Latex - 111 is based on acrylic 100% bonding agent supplied as a ready to use bonding agent in liquid consistency. It is reducing shrinkage, prevents cracking, prevents dust pick up and improves abrasion resistance.

Gruton SBR Latex - 111 is bonds strongly to old & new concrete and to plasters and used for repair of spalled concrete.

ACRYLIC 100% BONDING AGENT FOR REPAIR & WATER PROOFING

Area Of Use

Repair structural concrete, fixing or re-fixing of slip bricks, tiles, stones & marble bedding, waterproofing and as a bond coat

Applications & Coverage

1. For Floor screeds/renders applications

1 kg of SBR latex-111 will cover 70-80 sq. ft. area in 2 coats for a proportion mix 1:4:7 (SBR Latex: Water: Cement)

2. Bonding agent for rendering/ Bonding between old and new concrete

Mixing Ratio

Gruton SBR Latex - 111 with water = 1:1 by volume (or by weight)

All Method Working (Except spray) to coating primer (Bonding coat) Gruton SBR Latex - 111 with water (Ratio 1:1) With cement on surface by brush. Coating with mortar on bonding with wet on wet.

Floor : Ceramic Wall & Porcelain Tiles 300x600, 600x600, 800x800, 600x1200, 800x1600, 1200x1800 mm


Packaging : 1ltr, 5 ltr, 20 ltr

Features

- * High Performance .
- * Consistent & Proven quality
- * No site mixing required .
- * Easy to determine working quantity
- * Minimal wastage.



ACCESSORIES

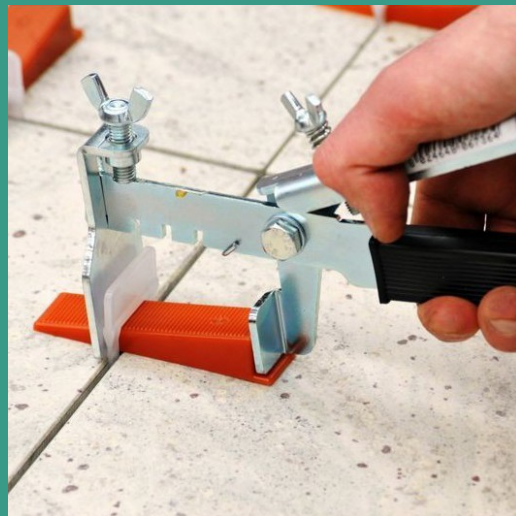

Fast Intallation



High Accurate



Easy To Use





NOTCH TROWEL

Product Description

Gruton Notch Trowel is an application tool that is used to spread tile and stone adhesives at the time of tile fixing. This application tool is manufactured with top-quality material and advanced techniques to make it highly useful in evenly spreading tile adhesives during tile installation. This is why Gruton's notch trowel, made of steel.

Packaging Units: V Notch - 3 mm
Square Notch - 6 mm
U Notch - 12 mm, 800x1600 mm

Packaging Type : Tool

Area of Applications

Surface on which it is used: Use it on all types of ceramic tiles: glazed tiles, porcelain tiles, vitrified tiles, fully vitrified tiles, natural stones*, large format tiles, glass mosaic tiles, composite stones, and engineered stones.

Area of application: It can be used on floors and walls in internal and external areas, in domestic as well as commercial applications.

Features

- ✦ Easy to apply: A notched trowel takes out a thin set of tile adhesive to spread it over the substrate. The trowel has defined notches on the sides that help create an even base for the tile to sit perfectly on the substrate.
- ✦ Proper levelling: The notches that are either square, V-shaped, or U-shaped create a level surface so that tiles are properly aligned. The application tool ensures that extra adhesive does not sit on the surface, which gives professional-looking tiled walls and floors.
- ✦ Full coverage with better bonding: coverage is very important if you want to achieve better bonding between the substrate and tiles. A notched trowel creates an even surface where the tiles are placed to form a strong bond with the substrate.
- ✦ Less time consumption and faster work: Professionals use a notch trowel tool to speed up the tile fixing process. This tool helps in getting a professional tile application in less time and eases the application work.

T LTR



TILE SPACERS

Product Description

Gruton spacers are small, T-shaped tools used to provide even gaps between the tile joints during installation. It is a crucial part of the tile application process, providing a professional finish and even distribution between adjacent tiles. A tile installation done by using the right application tool, like Gruton spacers, has a clean look and straight grout lines when the adhesive dries. Gruton spacers for tiles come in different sizes: 2, 3, 4, 5, and 6 mm. The availability of different sizes of grout spacers allows professionals to get grout lines ranging from narrow to wider. Depending upon the tile structure, space, and aesthetics, spacers can be used to get clean and equal spaces between tiles. It also ensures that the tile joints have the right amount of product for them to be grouted properly. Using spacers for tiles gives a secured and durable surface.

Area of Applications

Material to be spaced: Gruton tile spacers can be used on all types of tiles and stones, such as vitrified tiles, ceramic tiles, terracotta, brick, and large format tiles.

Substrate/ Surface: It can be used on cement-based screeds, cement-based plasters, concrete surfaces, bricks, and other cement-based surfaces.


Area of application: Spacers can be used for tile fixing on floors and walls in internal as well as external areas. It is suitable for use in domestic applications, commercial applications, and dry and wet areas.

Features


- ✦ Create an even grout line: Gruton spacers are used in tile installation to achieve equal distance between tiles and to create even lines in grout. The joints between consecutive tiles are uniform, ensuring overall uniformity on the tiled surface.
- ✦ Enhanced Design Aesthetics: Tile application in any space is done to not only provide functionality but also to enhance its aesthetics. A properly tiled surface with equal space between each tile has a clean and professional look. Tile spacers help maintain that cohesive and even look.
- ✦ Easy repair access: Using spacers for tile application is advisable as it creates a sufficient gap between adjacent tiles, making it easy to replace any tile in the future if it gets damaged. In a nutshell, it gives easy repair access without damaging adjacent tiles.

Packaging Units: 2 / 3 / 4 / 5 / 6 / 8 / 9 / 10 mm
(100 pcs / packet)

Packaging Type : Tool

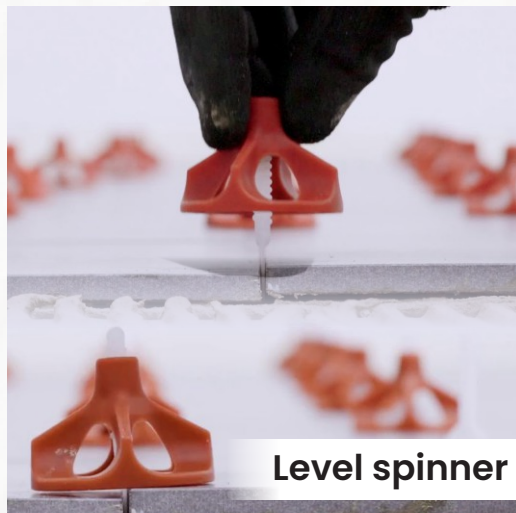

Level spinner

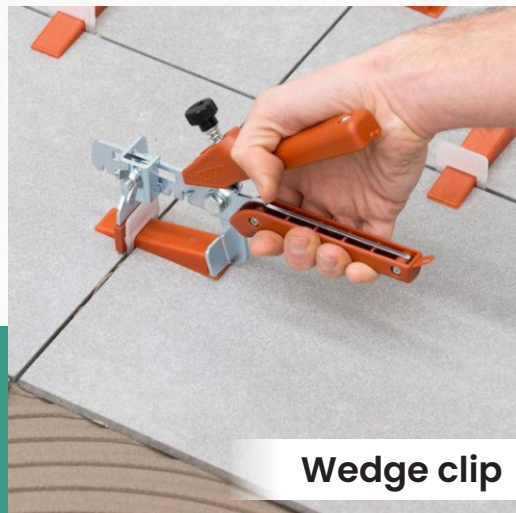

Wedge clip



Equalizer jack

Tile Equalizer (Levalar Kit)

Product Description

The levelling Clips & Wedges is designed for a faster and easier tile installation. Easy to operate, it enables to obtain perfectly flat floor and wall coverings, even in the most difficult cases, such as the installation of large format slabs. Just two components and one simple movement are enough to quickly and accurately prevent lippage between adjacent tiles. Additionally, no need to use spacers to create grout lines.

Area of Applications

For all kind of tiles and stone slabs on floors and walls. Particularly suitable when installing large format tiles. For tiles with thickness from 3 to 12 mm.



Substrate/ Surface: It can be used on cement-based screeds, cement-based plasters, concrete surfaces, bricks, and other cement-based surfaces.

Area of application: Spacers can be used for tile fixing on floors and walls in internal as well as external areas. It is suitable for use in domestic applications, commercial applications, and dry and wet areas.

Features

- ✦ Compatible with all types of tiles
- ✦ Fast installation time
- ✦ Save money from costly repair

Packaging : Wedges & Clips - 1, 1.5, 2, 3, 4 mm
(50 pcs / packet)

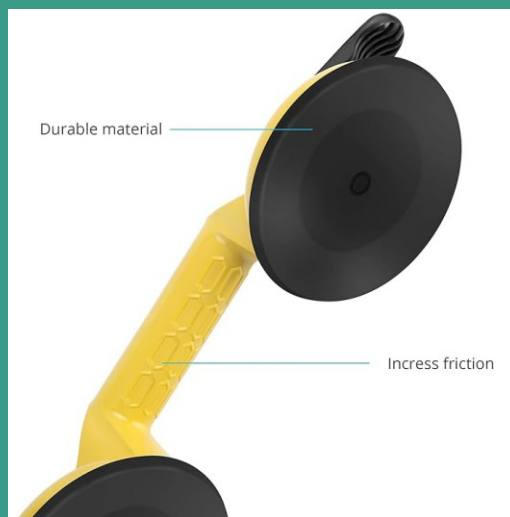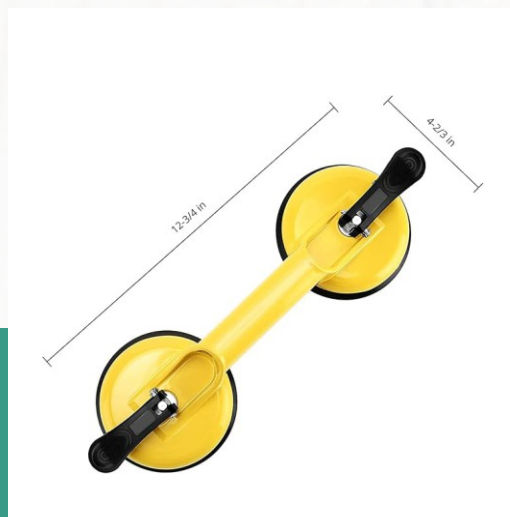

TILE & GLASS SUCTION CUP

Product Description

Gruton tile suction cup is a versatile tool designed for handling and manipulating tiles, glass, and other smooth surfaces. Here's a description of a typical tile suction cup.

Typically made from durable, high-quality materials like rubber or silicone for the suction cup itself and a sturdy plastic or metal for the handle.

Area of Applications

Ideal for tile installation, removal, or repositioning, as well as for handling glass, mirrors, and other smooth materials. The suction cup minimizes the risk of damage and makes it easier to maneuver large or heavy items.

Features

- ✦ Some advanced models might include additional features like multiple suction cups for increased stability, adjustable handles, or ergonomic designs for better grip and control.

Packaging : 1 piece



GRUTON CHEMICALS LLP

Survey No. 48, Plot No. 12, Royal Industrial Estate,
At. Pipli Village, Morbi-363642(Gujarat) INDIA.

+91-9512366166

Info@gruton.com

www.gruton.com

